

HIGH-DENSITY POLYETHYLENE MEDIA FILTERS



Neptune TOP-MOUNT SAND FILTER

PRECAUTIONS: The pressure gauge will indicate the build-up of sand in the filter. At the start of each season, the sand should be thoroughly cleaned. All filters, through the life of the filter, should be cleaned. A clean filter will provide the most efficient filtration. A clean filter will also provide the most efficient filtration.

INSTALLATION: The filter should be installed in a location where the water supply to the pool is not interrupted. The filter should be installed in a location where the water supply to the pool is not interrupted.

MAINTENANCE: The filter should be cleaned at the start of each season. The filter should be cleaned at the start of each season.

Model No.	SP100P	SP150P	SP200P
Capacity (Gallons)	100	150	200
Capacity (Liters)	378	568	757
Weight (Lbs.)	15	22	30
Weight (Kgs.)	7	10	14

Neptune
for swimming pools

SCAN FOR
MORE INFO



KEY FEATURES


- High-density polyethylene tank provides strength and durability.
- Top diffuser ensures even distribution of water over the filter media.
- Oil filled pressure gauge.
- Materials are reliable, non-corrosive and designed for all weather conditions.
- UV treated to be able to work in direct sunlight.
- Suitable for all filter media; sand, zeolite and glass.
- Warranty: 5 years on tank, 2 years on multi port valve, 1 year on pressure gauge and internals.



PRODUCT DIMENSIONS

Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Filter media quantity required (guide only)			
							Sand kg / 20kg bags	Zeolite kg / 15kg bags	Coarse Glass kg / 15kg bags	Fine Glass kg / 15kg bags
20 inch SF500P	845	730	670	235	527	500	85 / 4	60 / 4	25 / 2	40 / 3
25 inch SF650P	950	835	775	300	627	500	145 / 7	105 / 7	45 / 3	60 / 4

Sand size may differ from country to country and therefore sand weights may vary.

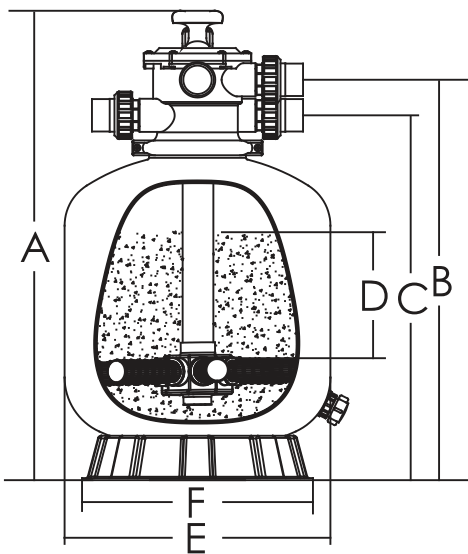

PRODUCT INFORMATION


Filter Size	Model	Valve Port Size	Filter Area (m ²)	Flow Rate
20 inch	SF500P	40mm / 1.5"	0.22	185L/min
25 inch	SF650P	40mm / 1.5"	0.31	260L/min

TECHNICAL INFORMATION

FUNCTIONS : Refer to 6-Way Multi-port Valve

Max Working Pressure	250kPa / 36psi / 2.5bar
Factory Testing Pressure	400kPa / 58psi / 4.0bar
Max Water Temperature	43°C (109°F)
Size of Silica Sand	0.5-0.8mm
Max Filtration Velocity	50mm ³ / h / m ²

AVAILABLE FROM YOUR
LOCAL POOL PRO STOCKIST



* Warranty T&C's apply.



TANK*



MPV*



PARTS*